

10/671,295 R90-892

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 July 2005 (21.07.2005)


PCT

(10) International Publication Number
WO 2005/066836 A1

- (51) International Patent Classification⁷: G06F 17/30, 11/14 (74) Agents: SLINGSBY, Phillip, Roy et al.; Page White & Farrer, 54 Doughty Street, London WC1N 2LS (GB).
- (21) International Application Number: PCT/IB2004/004252 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 22 December 2004 (22.12.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0330051.4 24 December 2003 (24.12.2003) GB (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (for all designated States except US): NOKIA CORPORATION [FI/PT]; Keilalahdentie 4, FIN-02150 Espoo (FI).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): LA PENSEE, Mark [GB/GB]; 48 George Road, Guildford, Surrey GU1 4NR (GB).
- Published:
— with international search report

[Continued on next page]

(54) Title: FILE SYNCHRONISATION

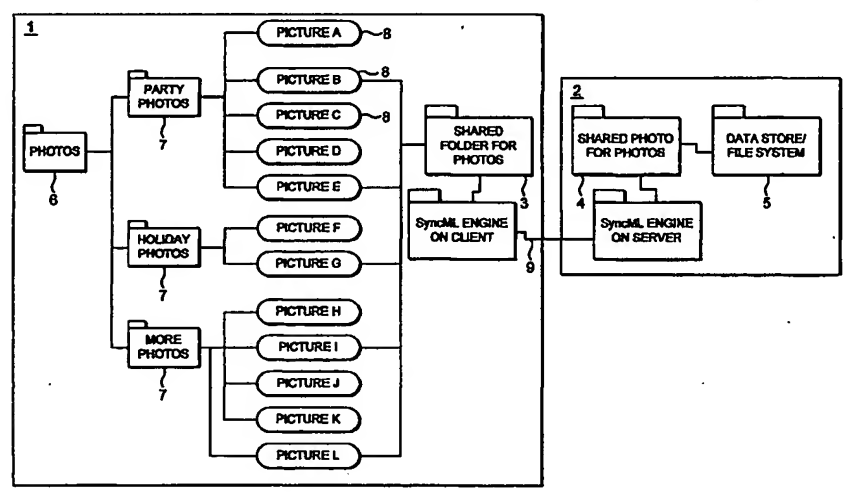

(57) Abstract: A method for synchronising data between a client device and a server device, at least one of the client device and the server device having synchronisation means, the method comprising : defining a first folder in a memory of the client device; defining a second folder in a memory of the server device; storing in the first folder data items of a certain type to be synchronised from the client device; storing in the second folder data items of the same type to be synchronised from the server device; and associating with each data item stored in the first and second folders an identifier for identifying the item; the client device and the server device being arranged such that a user of the devices cannot create subfolders within the first or second folders; and the synchronisation means being adapted to synchronise data items in the first and second folders on connection of the client device to the server device.

WO 2005/066836 A1



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

FILE SYNCHRONISATION

Field of the Invention

5 The present invention relates to the transfer and synchronisation of data between electronic devices, and particularly to client and server devices.

Background of the Invention

10 In the general field of personal information management (PIM) it is commonly desirable to enter data into an electronic device, which might be a personal computer (PC), a mobile communications handset or a personal digital assistant (PDA), and subsequently to transfer the entered data from that device to another device with which the first device can be electrically connected. As a simple example, a user
15 might wish to add a telephone number to the memory of a mobile telephone and to assign a name to that number. The user might then wish to update a phone book stored in the memory of his PC in order to update the PC phone book to include the new phone number data.

 Currently used protocols for carrying out such synchronisation include
20 SyncML. SyncML can be used to synchronise PIM data between a client device and a server device. Currently, only certain types of data stored in the client device or the server device can be synchronised. These types include contact data, calendar data and general notes. With SyncML, when a client device is connected to a server device, synchronisation will automatically take place to update the client device with
25 any contact, calendar or notes data that has been entered into the server device since the most recent synchronisation, and correspondingly to update the server device with such data as has been added to the client device's memory since the last synchronisation.

According to the SyncML protocol, data to be synchronised must be stored within specific folders outside of the general file systems of the devices in which the data is stored. Thus, there will typically be a contacts folder, a calendar folder and a notes folder for storing data in a client device, and corresponding folders in a server device. Other types of data such as Word files, Excel files or picture files will be stored in a file system separately from the contacts, calendar and notes folders. This other data cannot be synchronised according to the SyncML protocol. The reason for this is that file systems do not necessarily incorporate mechanisms whereby every file and every folder can be identified uniquely within a device's memory for the entire lifetime of the device. Therefore, it is not possible to accurately determine whether a given folder in a file system has been added, amended or deleted since a previous synchronisation.

Known identifiers that are typically used in current file systems and/or databases include locally unique identifiers (LUIDs) and globally unique identifiers (GUIDs). An LUID is unique within a client device for a particular data store. LUIDs do not exist in file systems, only in databases.

A GUID is an identifier that is unique within a server device for a particular data store.

By the use of LUIDs and GUIDs in combination, a server device can determine correspondence between data items stored on a client device and those stored on the server device, and the server device can establish whether any of the data items have changed, or been added or deleted, since the last synchronisation.

Hierarchical file systems have the drawback of not being able to track when a folder has been re-named. SyncML, for example, has three commands: an add, a replace and a delete. None of these is capable of tracking a name change because when a folder is re-named, this change will be treated by SyncML as a delete of the original folder followed by an add of the newly named folder.

One way of overcoming this drawback would be to change the name of the root folder in which the folder is stored. However, this would be extremely inefficient because it would result in the transfer of all data stored in all folders within the root folder from one device to another when synchronisation takes place.

- 5 It is desirable to provide a method for synchronising data between devices which does not have the limitations of currently known file systems.

Summary of the Invention

- 10 In accordance with a first aspect of the present invention there is provided a method for synchronising data between a client device and a server device, at least one of the client device and the server device having synchronisation means, the method comprising: defining a first folder in a memory of the client device; defining a second folder in a memory of the server device; storing in the first
15 folder data items of a certain type to be synchronised from the client device; storing in the second folder data items of the same type to be synchronised from the server device; and associating with each data item stored in the first and second folders an identifier for identifying the item; the client device and the server device being arranged such that a user of the devices cannot create subfolders within the first or
20 second folders; and the synchronisation means being adapted to synchronise data items in the first and second folders on connection of the client device to the server device.

- The first and second folders are preferably parts of file systems within the client device and the server device respectively, and the file systems may be such
25 that any type of data can be stored in such a way that it can be synchronised on connection of the client device to the server device.

Each data item identifier is preferably unique within the client and server devices. A data item stored in the first folder or the second folder may be associated

with a corresponding data item stored in the second folder or the first folder respectively by means of the identifier of the data item.

In accordance with a second aspect of the present invention there is provided a device for storing data, the device comprising a memory having a first folder, wherein: the first folder comprises data items of a certain type to be synchronised with a remote device, each data item having an associated identifier for identifying the item; the device is adapted to prevent a user from creating subfolders within the first folder; and synchronisation means within the device or the remote device are adapted to synchronise data items in the first folder with the remote device on connection of the device to the remote device.

The synchronising means may be adapted to synchronise data items in the first folder with corresponding data items stored in a second folder in the memory of the remote device.

Preferably, the first folder is a part of a file system within the device, and the file system may be such that any type of data can be stored in such a way that it can be synchronised with the remote device on connection of the device to the remote device.

Each data item identifier is preferably unique within the device, and a data item stored within the first folder may be associated with a corresponding data item stored in the remote device by means of the identifier of the data item.

In accordance with a third aspect of the present invention there is provided a system comprising: a client device comprising a memory having a first folder, the first folder comprising data items of a certain type to be synchronised from the client device; a server device comprising a memory having a second folder, the second folder comprising data items of the same type to be synchronised from the server device; and synchronisation means within at least one of the client device and the server device; wherein each data item in the first and second folders is associated with an identifier for identifying the data item; the client device and the server device

are adapted to prevent a user of the devices from creating subfolders within the first or second folders; and the synchronisation means are adapted to synchronise data items in the first and second folders on connection of the client device to the server device.

5

Brief Description of the Drawings

The invention will now be described by way of example with reference to the accompanying drawings, in which:

10

Fig. 1 shows the schematic representation of a file system of an embodiment of the present invention.

Detailed Description

15

Embodiments of the present invention provide a file system in which one folder is allocated for every different type of data content. The folder will be allocated a name and a path. The name and path are not editable by a user. In addition, it will not be possible for a user to create child folders from these folders. The only operations which are available to a user are adding, deleting and modifying individual files within these folders.

20

A convenient term for these folders is "shared folders". Since a folder is allocated for each type of content, a file system will typically contain, for example, a shared folder for photos, a shared folder for ring tones and so on.

25

By default, a shared folder will initially be empty, and will remain empty until a user stores information as a file within that shared folder. Each shared folder will in essence act as a mini database for a particular data type. To do so, it may contain data of that type either directly - by virtue of that data being stored in that folder - or

indirectly - by storing or being associated with a link, a tag or a shortcut to that data, the data itself being stored in another folder.

When a file is added to a shared folder, the file will be allocated an LUID. Saving a new file within a shared folder, or copying a file from another folder to a shared folder, will be treated as an add command. If a file is subsequently deleted
5 from a shared folder or moved from a shared folder to another folder the file will be treated as deleted. If a file is edited by a user, this will be treated as a replace command.

If a user wishes to synchronise a particular file, this may be achieved either by
10 "tagging" that file as "syncable", or by copying the file to a shared folder for the appropriate data type. Either of these actions will be treated as an add command. Once copied into the shared folder, the file will be allocated an LUID.

A file can be excluded from synchronisation either by deleting the file altogether from a client device or a server device, or by "untagging" it, or alternatively
15 by moving the file into a different folder which is not a shared folder and therefore not syncable.

Preferably, an LUID value will only be used once per shared folder in the lifetime of a client device. A convenient length for the LUIDs is 32 bits, making approximately four billion values available.

20 Embodiments of the present invention can be applied to currently existing data stores, since the invention may be implemented in the hardware and/or software that controls writing to the datastore. Thus, in the case of a mobile telephone handset, for example, the hardware and/or software of the handset may be arranged so that a user of the handset may only make changes of certain types to data stored in folders
25 that are to be synchronised with another device. The hardware and/or software may also enforce that the user may only store data files of one or more pre-determined types in each folder. Whether a data file is of a certain type may be determined from a part of the file name (for example an initial or final part of the file name such as the

file specifier used in common operating systems) or from the content of the file (for example a file header that indicates the type of the data stored in the file).

A user's modification of folder names and folder paths can be restricted by the appropriate design of a user interface of a client device and/or a server device.

5 Figure 1 shows a schematic representation of a client device and a server device in accordance with an embodiment of the present invention. The client device 1 is connected to the server device 2 by link 9.

10 Within the client device's memory is a file system, shown generally within 1. A root "photos" folder is shown at 6, and three child folders within the root folder are shown at 7 – "party photos", "holiday photos" and "more photos". Each of the subfolders 7 contains photo data items 8 which may each represent a single photograph.

15 A shared folder for photos is shown at 3, and links can be seen from pictures b, e, g, i and l to the shared folder. These links denote that a user of the client device 1 has indicated to the device that those photos should be "syncable". This means that the data items corresponding to pictures b, e, g, i and l have either been copied into the shared folder 3 or have been tagged as syncable within the general file system. On connection of the client device to the server device, any changes that may have been made to these photos and saved to the memory of one of the devices will be synchronised to the other device.

20 In some embodiments, the shared folder 3, and the shared folder 4 within the server device, may contain files that are not also saved in the general memory of the client device (6, 7) or the server device (5). These files will be synchronised when the client device is connected to the server device.

CLAIMS

1. A method for synchronising data between a client device and a server device,
at least one of the client device and the server device having synchronisation means,
5 the method comprising:
 defining a first folder in a memory of the client device;
 defining a second folder in a memory of the server device;
 storing in the first folder data items of a certain type to be synchronised from
the client device;
10 storing in the second folder data items of the same type to be synchronised
from the server device; and
 associating with each data item stored in the first and second folders an
identifier for identifying the item;
 the client device and the server device being arranged such that a user of the
15 devices cannot create subfolders within the first or second folders; and
 the synchronisation means being adapted to synchronise data items in the first
and second folders on connection of the client device to the server device.
2. A method as claimed in claim 1 wherein the first and second folders are
20 respectively parts of file systems within the client device and the server device and
the file systems are such that any type of data can be stored in such a way that it can
be synchronised on connection of the client device to the server device.
3. A method as claimed in claim 1 or claim 2 wherein each data item identifier is
25 unique within the client and server devices.
4. A method as claimed in any preceding claim wherein a data item stored in the
first folder or the second folder is associated with a corresponding data item stored in

the second folder or the first folder respectively by means of the Identifier of the data item.

5 5. A device for storing data, the device comprising a memory having a first folder, wherein:

 the first folder comprises data items of a certain type to be synchronised with a remote device, each data item having an associated identifier for identifying the item;

 the device is adapted to prevent a user from creating subfolders within the first folder; and

10 synchronisation means within the device or the remote device are adapted to synchronise data items in the first folder with the remote device on connection of the device to the remote device.

15 6. A device according to claim 5 wherein the synchronising means are adapted to synchronise data items in the first folder with corresponding data items stored in a second folder in the memory of the remote device.

20 7. A device according to claim 5 or claim 6 wherein the first folder is a part of a file system within the device and the file system is such that any type of data can be stored in such a way that it can be synchronised with the remote device on connection of the device to the remote device.

25 8. A device according to any of claims 5 to 7 wherein each data item identifier is unique within the device.

9. A device according to any of claims 5 to 8 wherein a data item stored within the first folder is associated with a corresponding data item stored in the remote device by means of the identifier of the data item.

10. A system comprising:

a client device comprising a memory having a first folder, the first folder comprising data items of a certain type to be synchronised from the client device;

5 a server device comprising a memory having a second folder, the second folder comprising data items of the same type to be synchronised from the server device; and

synchronisation means within at least one of the client device and the server device; wherein

10 each data item in the first and second folders is associated with an identifier for identifying the data item;

the client device and the server device are adapted to prevent a user of the devices from creating subfolders within the first or second folders; and

15 the synchronisation means are adapted to synchronise data items in the first and second folders on connection of the client device to the server device.

11. A system according to claim 10 wherein the first and second folders are respectively parts of file systems within the client device and the server device and the file systems are such that any type of data can be stored in such a way that it can
20 be synchronised on connection of the client device to the server device.

12. A system according to claim 10 or claim 11 wherein each data item identifier is unique within the client and server devices.

25 13. A system according to any of claims 10 to 12 wherein a data item stored in the first folder or the second folder is associated with a corresponding data item stored in the second folder or the first folder respectively by means of the identifier of the data item.

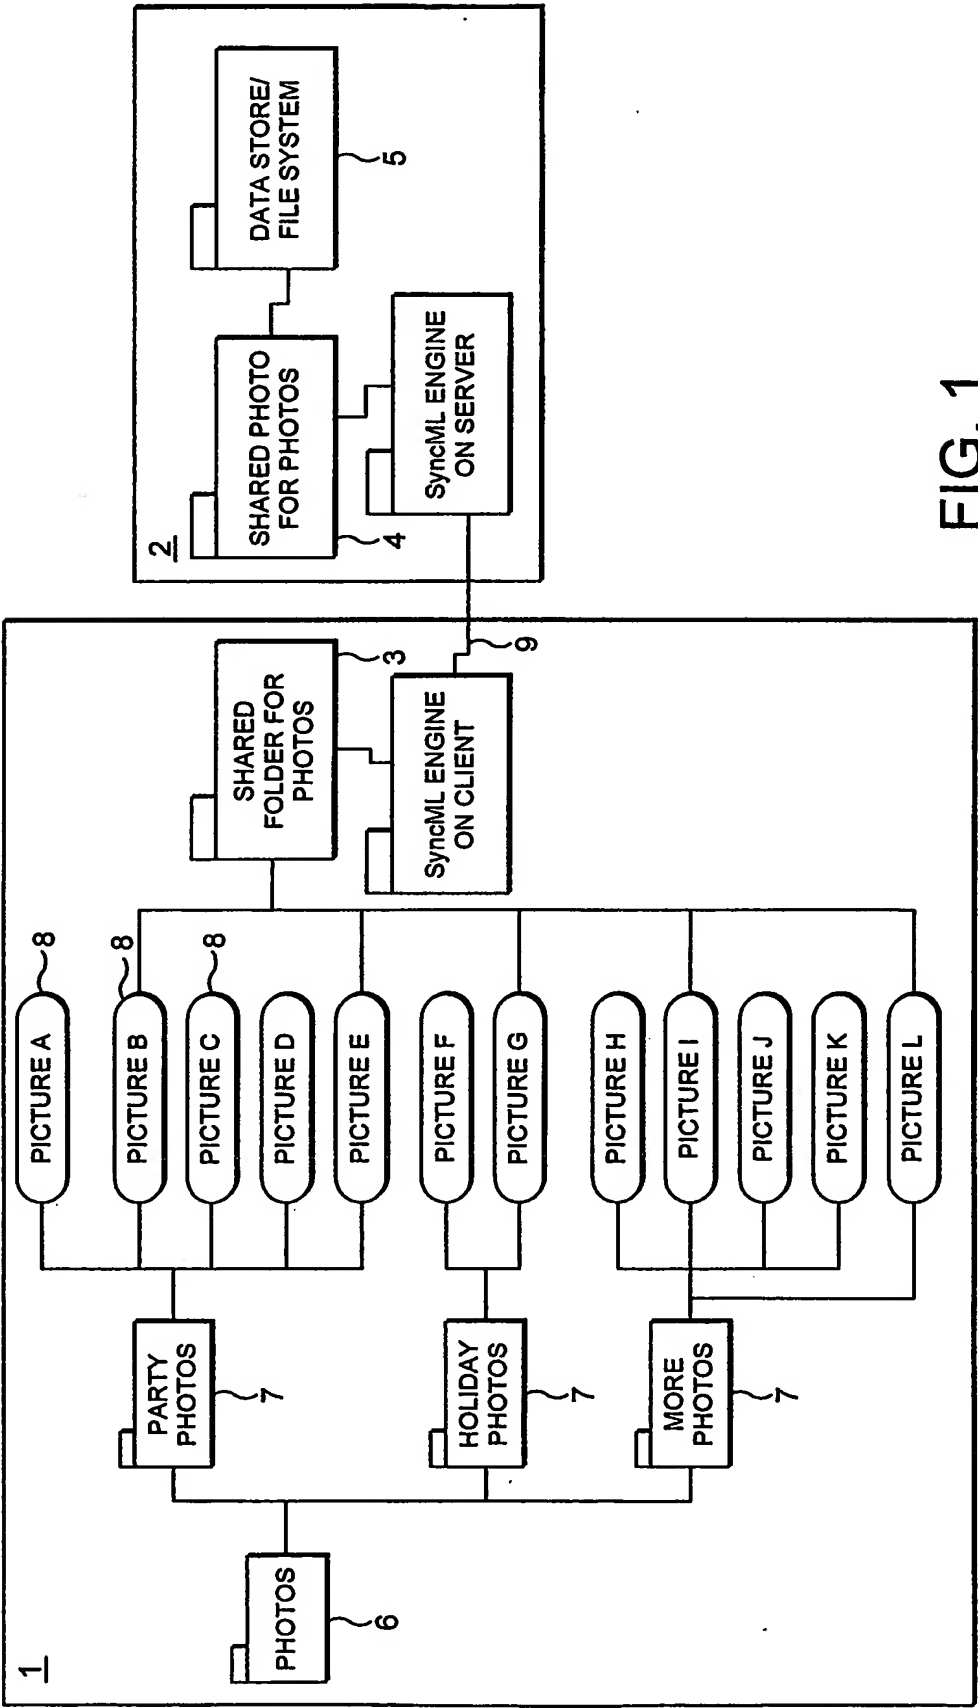


FIG. 1

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 2004/004252

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G06F 17/30, G06F 11/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6324544 B1 (S.ALAM ET AL), 27 November 2001 (27.11.2001), column 2, line 22 - line 34; column 3, line 15 - line 30; column 11, line 6 - line 24, figures 1,6	1-13
X	US 6581074 B1 (F.WONG ET AL), 17 June 2003 (17.06.2003), column 1, line 35 - column 3, line 5, abstract	1-13



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"B" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 May 2005

Date of mailing of the international search report

13-05-2005

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Oskar Pihlgren /itw
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 2004/004252

US	6324544	B1	27/11/2001	NONE
----	---------	----	------------	------

US	6581074	B1	17/06/2003	NONE
----	---------	----	------------	------